

# Stainless Steel Ball Valve - Two Piece - Spring Lever


LV 6290

Screwed BSPP, Full Bore, CF8M Stainless Steel Body, Ball & Stem, PTFE Seats & Seals, Anti-blowout Stem, Spring Close Lever.



Pressure / Temperature Specifications	
Pressure	PN63
Temperature	-10°C to 180°C

Material Specifications		
1	Body	CF8M Stainless Steel
2	Cap	CF8M Stainless Steel
3	Ball	CF8M Stainless Steel
4	Seat	PTFE
5	Joint Gasket	PTFE
6	Stem	AISI 316 Stainless Steel
7	Thrust Washer	PTFE
8	Stem Packing	PTFE
9	Gland Nut	AISI 304 Stainless Steel
10	Handle	AISI 304 Stainless Steel
11	Stem Nut	AISI 304 Stainless Steel
12	Handle Cover	Plastic
13	Spring	AISI 304 Stainless Steel

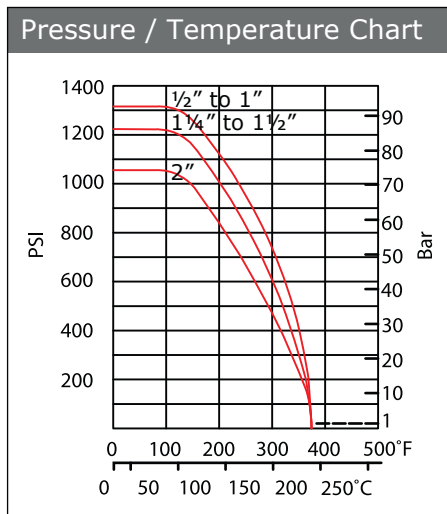

Dimensions													
Size	d	L	H	W	S	S1	X	N	P	BL	CV	Nm	Kg
1/2"	15	57	53	95	16.8	10.2	5.0	12.5	25	5/16"	11.2	5.4	0.42
3/4"	20	65	59.5	110	21	13.5	6.5	21	24	3/8"	21	7.4	0.58
1"	25	76	73	135	24	16	8	22.5	33.5	7/16"	35	10.4	0.94
1 1/4"	32	87.5	79	135	25	16	8	23.5	38.1	7/16"	57	13.5	1.44
1 1/2"	38	102	90.5	165	26.5	17	9	23.5	38.1	1/2"	80	18.0	2.09
2"	50	123	98.5	165	26.5	17	9	23.5	38.1	1/2"	148	25.0	3.5

